

Introduction

Easy-to-use NAND analyzer system, suitable for massive quantity NAND acceptance inspection, operation verification, and error investigation.

This system consists of the main-board (with FPGA-based NAND controller), sub-board(s) on which NAND is set for testing and Windows-based analysis software.

Features

1. Main-board (Sp3993)

Sub-board	1~8 set(s) connectable
NAND	1~128 NAND chip(s) simultaneously tested
PC I/F	USB2.0, USB3.0, Giga Ethernet
LED	Communication indicator (NAND/PC)


2. Sub-board (Sp3993-x)

NAND	1~16 NAND chip(s) simultaneously tested
Cable	Up to 2m connection to Main-board
Power	Supplied by main-board, each sub-board has ON/OFF switch
Voltage Control	voltages supplied to NAND are controllable by analysis software
Operating Temperature	-40°C~85°C

3. Analysis software

Analysis software enabling: (part of features)

- NAND interface timing setting
- NAND device power voltage setting
- NAND device ID information and status check
- Bad Block scan and management
- Access time measurement
- P/E cycle dependence of access time

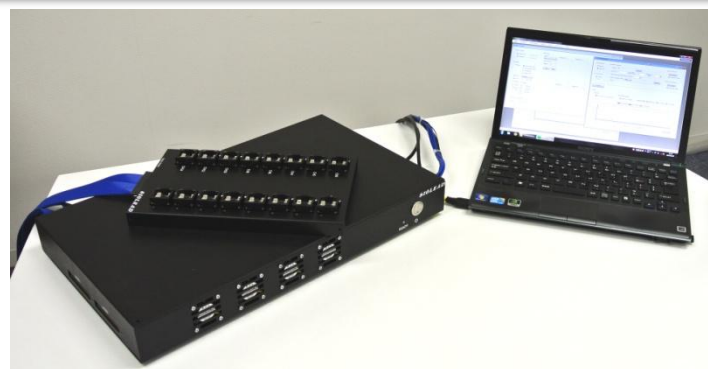

- NAND command (Erase, Program, Read)
- Program pattern settings (Increment, Pseudo Random, Page Stripe etc.)
- Dump of read data and save to file
- P/E Cycle (P/E cycle number, flexible settings of program patterns)
- Script execution(Siglead Script Language; SSL)
- Error rate measurement(Bit ER, Page ER after ECC)
- ECC strength settings (code length and correctable error number)
- Data retention measurement(time vs bit error)
- Program disturb measurement(P/E cycle vs bit error)
- Error distribution(page/column dependence)

NAND devices support

- ONFI 4.1 / Toggle DDR 2.0(SLC / MLC / TLC / 3D)
- NAND IF : Asynchronous / Synchronous / Toggle DDR
- Package : TSOP 48pin, BGA 63/100/132/152pin
- Verified to work with latest NAND device (Toshiba 15nm, SanDisk 15nm, Micron/Intel 16nm, Samsung 14nm, Hynix 16nm)
- If a NAND device is not compatible, please contact us for adjustment to achieve compatibility

Support

- 1 year technical support (via telephone and email)
- 1 year free version update/bug-fix of analysis software
- For the support after 1 year since purchase, an extra support contract is needed

Deliverables

Deliverables consists of the following parts. Immediate analysis can be carried out at the date of delivery

<Main-board set>

- Main-board(Sp3993)
- Power unit
- Analysis software
- NAND controller circuit and firmware
- Operational Guide
- * USB cable and LAN cable are not included

<Sub-board>

- Sub-board(Sp3993-x)
- Cable(standard length is 1m, 2m max)

Products and specifications introduced herein are subject to change by Siglead without notice

Please contact us for further works such as customization and peripheral circuit design

SIGLEAD Inc.

1-38-10-203 Nakagawachuo Tsuzuki
Yokohama Kanagawa
224-0003, Japan

■Contact and Ordering information

TEL/FAX : +81-45-509-1885

E-mail : info@siglead.com

LEADING™
HIGH QUALITY
SIGNALS
<http://www.siglead.com>